

# TD-1060 *slim*

Qbic's TD-1060 Slim space management system is the perfect complement to any workplace, retail, or professional location requiring a top-tier solution with a minimal footprint.



Direct Bonding



LED Status Light



Ultra-thin chassis depth



PoE+



2.4G & 5G



API Support



RCC  
Remote Configuration Center




Kensington lock slot




# TD-1060 Slim

## Technical Specification

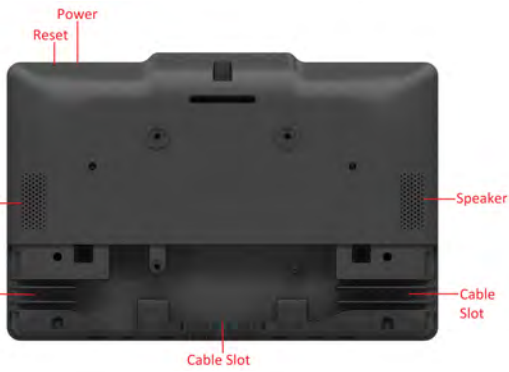

Features	Programming API	HTML5 / SMIL / Android API	
	PoE+	Yes	
	Beacon (BLE)	Option	
	Light bar	Front LED	
System	OS	Android 8.1 / 10 / 12	
	CPU	ARM Quad-core 1.5GHz (64 bit)	
	Memory	2GB DDR3L	
	Storage	16GB eMMC	
	Video decoder	H.264 / H.265,VC-1, MPEG-4, VP8	
	Image codecs	JPEG/BMP/GIF/PNG	
	Audio codecs	MPEG/OGG/ACC	
Media	Speaker	2W x 2	
Display	Size(inch)	10.1"	
	Display Resolution	1280 x 800 (16:10)	
	Brightness	350 nits	
	Contrast ratio	1000:1	
	Touch	Yes (Multi-touch)	
	Viewing angle (H/V)	170°/170°	
	Orientation display	Landscape / Portrait	
I/O Interface ( External )	Ethernet	1 x RJ45 (10M/100M)	
	DC Input	Yes	
	USB 2.0	2 x USB2.0 type A	
	Audio out / microphone combo jack	1 x 3.5mm stereo (TRRS Type OMTP)	
	ADB	1 x Micro USB (ADB)	
	Storage Expansion	1 x Micro SDHC slot	
	Reset Button	Yes	
	Power Button	Yes	
	Connectivity	WLAN	Opt.:WLAN 802.11b/g/n/ac 2.4 GHz,/5GHz
	Power	Input Voltage (V)	DC 12V
Mechanical		Dimension (WxDxH) (mm / inch)	248 x 166 x 20.8mm (9.76"x6.54"x0.82")
		Net. Weight (Gm/Lb)	615g/1.375lbs
		Mounting type	Glass / Surface
Environment	Material	Plastic	
	Operating Temperature(oC /oF)	Operating Temp. 0~45°C (32°F to 113°F)	
	Storage Temperature (package included) (oC /oF)	Storage Temp. -20°C to 70°C (-4°F to 158°F)	
Certification & Safety	Ambient Relative Humidity	Humidity: 10% to 90% (non-condensing)	
	Certification	CE / FCC / BSMI / NCC / RoHS / RCM	
Warranty	Warranty Period	1 yr	
Accessory	Adapter	Option: DC 12V, 1.5A AC-00M(EN)/AC-00N(UK)/AC-00O(US)/AC-00G(SG)	
	Bracket Kit	Option: AC-140 (Screws*1, Bracket*1, Tape*1)	
	IO Cover	Yes	
	Screw	Yes	
	QSG	Yes	

## Optional Accessories



Bracket Kit



Adapter DC 12V 1.5A



Adjustable Stand 30°/45°/60° Tilt AC-112



Global Region [info@qbictechnology.com](mailto:info@qbictechnology.com)

[www.qbictechnology.com](http://www.qbictechnology.com)

+886-2-2697-2000

TECHNOLOGY

US Region [info.us@qbictechnology.com](mailto:info.us@qbictechnology.com)

[www.qbicamerica.com](http://www.qbicamerica.com)

+1-510-573-6641